

# HARVIA VEGA

HCB350400S

This powerhouse heater for small saunas features operating switches on the top part, making the user experience as ergonomic as only Harvia provides. The heater is easy to install onto the wall mount with one screw and can be mounted very low

## **Advantages**

- Small and compact wall-mounted heater
- Can be installed particularly low on the sauna wall ensuring that the lower benches also enjoy plenty of heat
- The heater's operating switches are located near the top of the heater



EÆE C€

## Features

Main material : Steel H x W x D : 505.0 x 280.0 x 295.0 mm Net weight (kg) : 7.0 Installation location : Wall

ID	GTIN	Output (kW)	Sauna room size min - max m3
HCB350400S	6417659010382	3.5 kW	2.0-4.5

## DATA SHEET HARVIA ELECTRIC HEATERS

## Spare parts

Product	ID	Pcs
Heating element 1150W/230V, Vega Compact	SPZSB-770	3
Knob thermostat Vega, black	SPZSB-115	1
Knob timer 4+8h Vega, black	SPZSB-125	1
Timer 4+8h	SPZSK-510	1
Thermostat overheating limiter switch	SPZSK-520	1

HARVIA

### **Technical details**

Technical data	Type / attribute	HCB350400S
	Color	Stainless Steel
	Power output	3.5 kW
	Stone sizes	Ø5–10 cm
	Stone amount (kg)	12
Dimensions	Product width	280
	Product height	505
	Product depth (mm)	295
	Net weight (kg)	7
	Gross weight	8.1
	Package width	300
	Package height	470
	Package depth	300
Safety and installation dimensions	Safety distance front (combustible materials)	10
	Safety distance right side (combustible materials)	10
	Safety distance left side (combustible materials)	10
	safety distance to the side wall (combustible materials)	120
	Safety distance (Ceiling)	900
	Room min. height(depends on connections and therefore from output, star/delta)	1700
	Installation opening width	290
	Installation opening depth	305


DATA SHEET


HARVIA ELECTRIC HEATERS


HARVIA





#### **Technical images**

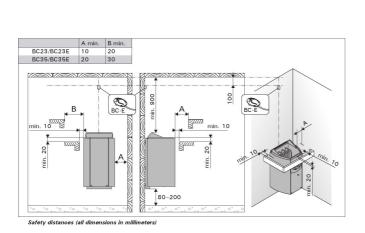









400 V 2N~ 230 V 1N~ K1U2 N N L1 L2 L3 W V U 1234 C90/C150 SENSOR FÜHLER RESIDUAL CURREN DEVICE FEHLERSTROM-SCHUTZSCHALTER RESIDUAL CURREN DEVICE FEHLERSTROM-SCHUTZSCHALTER SE LIGHT LICHT max. 100 W LIGHT LICHT max. 100 W 3 x 1,5 mm² 3 x 1,5 mm<sup>3</sup> CONTROL OF HEATING OPTIONALE STEUERI FÜR ZUSATZHEIZUN 4 CONTROL OF HEATING OPTIONALE STEUERU FÜR ZUSATZHEIZUNG POWER SUPPLY HAUPTZENTRALE POWER SUPPLY 4 00 V/230 V 3N BC23E BC35E 00 V/230 V 3N BC23E BC35E 1 -----BNL12 230 1N~ 0 \* 4 FUSES FUSES HERUNGEN JUNCTION BOX KLEMMDOSE SIC JUNC SWITCH FOR ALL-POLE DISCONNECTION SCHALTER FÜR ALLPOLIGE ABSCHALTUN

Electrical connections of control unit C90/C150 and heater BC-E