

HARVIA CILINDRO PRO

HPCE100400

The Cilindro Pro electric heater gives off hearty steam in a family sauna, but the superior features of the heater are especially beneficial to commercial saunas, hotels and housing companies, for example. The impressive tall pillar heater contains a massive amount of stones, and the robust heat elements are designed to withstand long operating times. This guarantees plenty of hearty steam for large groups of bathers. When you want the most out of your heater, choose the professional quality of the world's largest sauna heater manufacturer.

Advantages

- Particularly suitable for commercial saunas, hotels and housing companies
- Contains massive amount of stones that provides soft yet strong heat
- Heavy-duty heating elements are designed to withstand long operating times
- Fits into various types of sauna interiors and installations
- Heater can be embedded in the sauna bench or placed by a glass wall



Features

Main material : Steel

H x W x D : 1300.0 x 355.0 x 355.0 mm

Net weight (kg) : 18.1

Installation location : Floor

| ID | GTIN | Output (kW) | Sauna room size min - max m3 |
|------------|---------------|-------------|------------------------------|
| HPCE100400 | 6410082614158 | 13.2 kW | 9.0-20.0 |

Related products




HPC2




HPC2L



HPC5



HPC6



SFE-D350



Spare parts

| Product | ID | Pcs |
|--------------------------------|-----------|-----|
| Heating element 2200W/230V | ZSC-022 | 6 |
| Adjustable leg | ZSA-440 | |
| Packing sticker PC100/E...200E | ZSC-768 | |
| Heating element 2200W 230V | SPZSC-022 | 6 |

Technical details


| Technical data | Type / attribute | HPCE100400 |
|------------------------------------|--|-----------------|
| | Color | Stainless Steel |
| | Power output | 13.2 kW |
| | Stone sizes | Ø5–10 cm |
| | Stone amount (kg) | 140 |
| Dimensions | Product width | 355 |
| | Product height | 1300 |
| | Product depth (mm) | 355 |
| | Net weight (kg) | 18.1 |
| | Gross weight | 20.3 |
| | Package width | 365 |
| | Package height | 1350 |
| | Package depth | 365 |
| Safety and installation dimensions | Safety distance front (non-combustible materials) | 100 |
| | Safety distance front (combustible materials) | 100 |
| | Safety distance right side (combustible materials) | 100 |
| | Safety distance right side non-combustible materials | 100 |
| | Safety distance left side (combustible materials) | 100 |
| | Safety distance left side non-combustible materials | 100 |
| | Safety distance side (non-combustible materials) | 100 |
| | safety distance to the side wall (combustible materials) | 100 |
| | Safety distance behind (non-combustible materials) | 100 |
| | Safety distance behind (combustible materials) | 100 |
| | Safety distance (Ceiling) | 550 |
| | Room min. height(depends on connections and therefore from output, star/delta) | 1900 |
| | Installation opening height | 1900 |
| | Installation opening width | 555 |
| Installation opening depth | 555 | |

Technical images



| | min. mm | |
|------------|---------|------|
| | A | B |
| PC100E135E | 550 | 1900 |
| PC165E200E | 750 | 2100 |

Safety distances (all dimensions in millimeters)

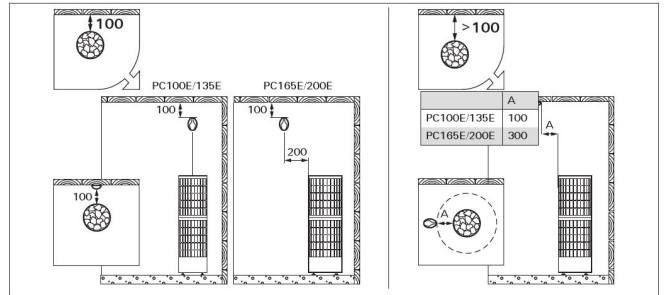

Installing the sensor (all dimensions in millimeters)


PC100E/135E
PC165E/200E



PC100E/135E




PC165E/200E



| | | | | | |
|---|--------------------------------------|-----------------------------|---------|----------------------------|--------|
| 1 | Vastus 2200 W/230 V | Värmeelement 2200 W/230 V | ZSC-022 | PC100E/135E PC165E/200E | 6 9 |
| 2 | Johdosarja | Kabelstam | ZSC-716 | PC100E/135E | 1 |
| 3 | Johdosarja | Kabelstam | ZSC-766 | PC165E/200E | 1 |
| 4 | Lämpöanturi | Temperatuurigivare | WX247 | PC100E/135E PC165E/200E | 1 |
| 1 | Heating element 2200 W/230 V | Heizelement 2200 W/230 V | ZSC-022 | PC100E/135E PC165E/200E | 6 9 |
| 2 | Wiring harness | Kabelbaum | ZSC-716 | PC100E/135E | 1 |
| 3 | Wiring harness | Kabelbaum | ZSC-766 | PC165E/200E | 1 |
| 4 | Temperature sensor | Temperaturfühler | WX247 | PC100E/135E PC165E/200E | 1 |
| 1 | Нагревательный элемент 2200 Вт/230 В | Кütteelementid 2200 W/230 V | ZSC-022 | PC100E/135E PC165E/200E | 6 9 |
| 2 | Жгут проводов | Жуһтmete kompleкт | ZSC-716 | PC100E/135E | 1 |
| 3 | Жгут проводов | Жуһтmete kompleкт | ZSC-766 | PC165E/200E | 1 |
| 4 | Температурный датчик | Температуриандур | WX247 | PC100E/135E PC165E/200E | 1 |

We recommend to use only the manufacturer's spare parts.

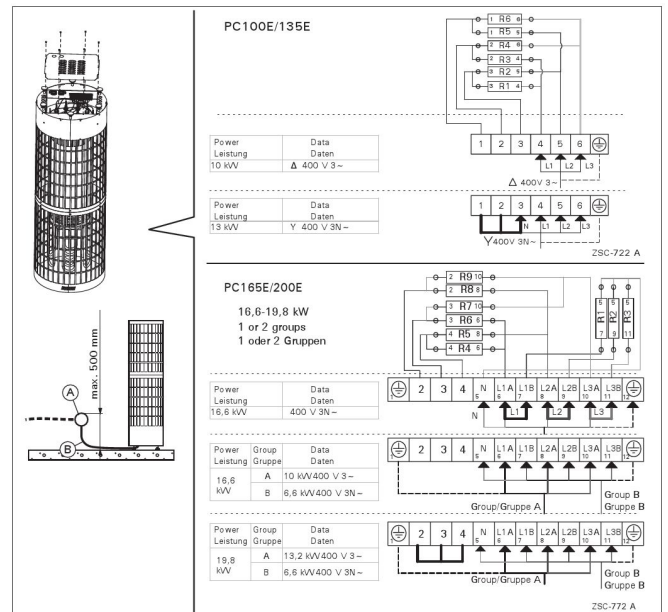

Electrical connections